



नबीनगर / Nabinagar

संदर्भ संख्या / Ref. No.: NSTPS/TS/EMG/2025/09/01

दिनांक / Date: 19.09.2025

To,
The Member Secretary
Bihar State Pollution Control Board
Parivesh Bhawan, Patliputra Industrial Area,
P.O. Sadakat Ashram, Patna-800010 (Bihar)


Email: bspcb@yahoo.com; msbspcb-bih@gov.in

Sub: Submission of Environmental Statement (Form V) for year 2024-25-24 of Nabinagar Super Thermal Power Station.

Dear Sir,

May pl find enclosed the Environmental Statement of NSTPS Nabinagar for the financial year ending 31st March 2025, under Rule 14 of the Environmental (Protection) Rule - 1986.

Yours faithfully,

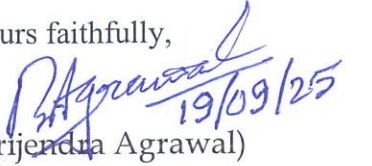
19/09/25

Brijendra Agrawal)

Add. General Manager (TS/EMG)

Enclosure:

1. Environmental Statement 2024-25

Copy:

Additional Principal Chief Conservator of Forests (Central)
Ministry of Environment, Forest & climate Change (ECZ)
Regional Office, Shyamali Colony
Ranchi-834002.

नबीनगर सुपर थर्मल पावर स्टेशन, पोस्ट-अदिति नगर, जिला: औरंगाबाद (बिहार), पिन कोड : 824304

Nabinagar Super Thermal Power Station, Post-Aditi Nagar, Distt.: Aurangabad (Bihar) Pin Code: 824304

पंजीकृत कार्यालय : एनटीपीसी भवन, स्कोप कॉम्प्लेक्स, 7 इंस्टीट्यूशनल एरिया, लोधी रोड, नई दिल्ली-110003

Registered Office : NTPC Bhawan, SCOPE Complex, 7 Institutional Area, Lodhi Road, New Delhi-110 003

कॉरपोरेट आइडेंटिफिकेशन नम्बर / Corporate Identification Number : L40101DL1975GOI007966 वेबसाइट / website: www.ntpc.co.in

ENVIRONMENTAL STATEMENT

OF

**Nabinagar Super Thermal Power
Station, (NSTPS)**

***(FOR THE FINANCIAL YEAR ENDING
31ST MARCH 2025)***

***(Under Rule 14 of The Environmental
(Protection) Rule – 1986)***

ENVIRONMENT STATEMENT (NSTPS)

(FOR THE FINANCIAL YEAR ENDING 31ST MARCH 2023)

PART-A

1	Name & address of the Owner / occupier of the industry operation as process.	:	Sh. Ladu Kishor Behera, HOP, NSTPS, P.O. Aditi Nagar, Distt: Aurangabad, Bihar. Pin: 824304.
2	Industry Category primary (STC Code)	:	Thermal
3	Production Capacity (MW)	:	3X660 MW (All Units are in commercial operation).
4	Year of Establishment	:	2008
5	Date of last Environment Statement Submitted	:	25.09.2024

PART-B

(Water and Raw Material Consumption)

01. Water Consumption (M³/day):


Sl. No.	Water Consumption		(M ³ /year)	(M ³ /day)
1.	Industrial Cooling	:	33282305	91184
2.	For Process	:	968453	2653
3.	For Domestic	:	355960	975
	Total	:	34606718	94812

Process water consumption per product output (Liters/kWh)				
	Name of Products		During Previous Financial year (2023-24)	During the current financial Year (2024-25)
i.	ELECTRICITY	:	2.90	2.45

02. Unit#1 declared commercial on 06th Sept. 2019, Unit#2 on 23rd July 2021 and Unit#3 on 01st Jun 2022.

03. Raw Material Consumption:

Sl. No.	Name of Raw Materials	Name of Product	Consumption of raw material/ Unit (Kg/kWh)	
			2023-24	2024-25
i.	Coal	Electricity	0.603	0.652



PART-C

POLLUTION DISCHARGED TO ENVIRONMENT/UNIT OF OUTPUT

(Parameters as specified in the Consent issued)

Pollutants	Quantity of Pollutants Discharged (Kg/day)	Concentration of Pollutants in Discharges (mg/Nm ³)	% of variation from prescribed standard with reasons.
A: AIR POLLUTION (Stack Emission): Average			
SPM	3712.87	25.05	Within limit
SO ₂	162613.4	1101.23	Stack with 275 meters height is provided as per EC conditions. FGD installation is under process and will be completed by Dec' 2026. Limit not provided at initial stage. However, for NOx control, SOFA (Separated over fire air) and COFA (Close coupled over fire air) system is installed in the boiler. The boiler is of sliding pressure supercritical, once-through type, utilizing a Tangential Firing System.
NO _x	39179.07	265.92	
B: WATER POLLUTION: Plant is designed for Zero liquid discharge (ZLD).			
(i)	Ash Pond Effluents: There is no discharge from Ash Pond.		
(ii)	Main Plant Effluents: Effluent is being treated and recycled.		



PART-D

HAZARDOUS WASTES

HAZARDOUS WASTE (GENERATED)		Total Quantity of waste generated
		2024-25
(a)	From Process:	
1.	Used & dirty oil (in KL)	35.70
2.	Scrap Battery (in MT)	0.700
3.	Metal & Metal bearing Scraps	2500 MT
4.	Spent Ion-Exchange Resin	-
5.	Halogenated Aliphatic Compounds, Gassed on hazardous characteristics	15MT
(b)	From Pollution Control Facilities:	
		Nil


PART-E

SOLID WASTES

SOLID WASTE		TOTAL QUANTITY
		During the current fin. Year 2024-25
A.	FROM PROCESS (Generated)	
i)	ASH (MT)	35,53,991
B.	FROM POLLUTION CONTROL FACILITY:	
i)		Nil
C. (1)	QUANTITY RECYCLED OR RE-UTILISED WITHIN THE UNIT:	
i)	Fly Ash (MT)	Nil
ii)	Pond Ash (MT)	
(2)	SOLD (MT):	
i)	Fly Ash (MT)	8,84,451
ii)	Cenosphere (MT)	Nil
(3)	DISPOSED off to Ash Dyke (MT)	26,69,540

Note: -

The generated fly ash from Unit # 1, 2 & 3 is being lifted by different Cement industries and brick manufacturers from HCSD Silos -1, 2, 3 & 4 and the balance is being disposed to ash pond.



2. The wet ash from ash pond is issued to NHAI on free of cost basis. For FY 2024-25, Pond ash of 2319452 MT has been issued to NHAI and 256297 MT has been issued to Cement Manufacture.

PART-F

CHARACTERISATION (IN TERMS OF COMPOSITION OF QUANTUM) OF HAZARDOUS AS WELL AS SOLID WASTE AND DISPOSAL PRACTICE ADOPTED FOR BOTH THESE CATEGORY OF WASTES

A. HAZARDOUS WASTE DOSPOSAL STATUS AT NSTPS:

S. No.	Hazardous Waste per Authorization	Category	Approx. Quantity of waste generated during operation (year 2024-25)	Method of Disposal/Qty. Dispatched (MT/KL)
01	Used or spent oil (KL)	5.1	19.11 KL	Storage at identified place. Disposal as per procedure.
02	Plastic empty barrels/drum/container	33.1	6.56 MT	
03	Contaminated cotton rags or other cleaning materials	33.2	Nil	
04	Waste or residues containing oil	5.2	Nil	
05	Spent ion exchange resin containing toxic metal	35.2	Nil	
06	Oil and grease skimming	35.4	Nil	
07	Halogenated aliphatic compounds (C12-Eco-Toxic)	Sch-II as Class C	Nil	
08	Metal and metal bearing waste (Iron steel scraps)	Schedule-III as Part-D	2000 MT	Storage at identified place. Disposal as per procedure.

B. SOLID WASTE STATUS AT NSTPS:

S. No.	Solid Waste	Approx. Quantity/Year	Method of Disposal
01.	Ash (Fly + Bottom)	35.53 LMT (Ash Generated)	In cement and brick manufacturing & NHAI. Balance quantity disposed to ash pond.

Approved

PART-G

IMPACT OF POLLUTION ABATEMENT MEASURES ON CONSERVATION OF NATURAL RESOURCES AND THE COST OF PRODUCTION.


- NSTPS is designed for Zero Liquid Discharge (ZLD) and accordingly system like Ash Water Recirculation System (AWRS) which recycles & reuses effluents from ash pond, Liquid Wastewater Treatment System (LWTS) which recycles & reuses entire effluents generated in main plant and Sewage Treatment Plant (STP) for township & plant domestic effluent, effectively. These systems reduce the water requirement and consumption leading to significant water conservation. Water conservation has both direct and indirect effect on the cost of production as water is most precious natural resources.
- Depreciation cost of pollution control devices & cost of Operation & Maintenance of these devices has direct impact on cost of production.
- Extensive tree plantation has been carried out as a part of Greenbelt development which will control the impact of Air pollution and optimize the ambient temperature of surrounding areas. *App. 1.75 lac. saplings have been planted so far.*
- Miyawaki plantation work of 20,000 saplings is in progress NSTPP Township premises.
- Ash Utilization in cement industries, brick manufacturing industries and NHAI will lead to conservation of the topsoil and indirectly related to cost of production by reducing quantum of ash transportation to the ash dyke and additional capacity in ash dyke.



PART-H

ADDITIONAL MEASURES / INVESTMENT FOR ENVIRONMENT PROTECTION DETAILS

- Continuous ambient air monitoring stations at four locations are for better & effective monitoring of Ambient Air quality around the plant and township. AAQMS at all four locations are installed, commissioned and in service.
- Continuous Emission Monitoring System (CEMS) for stack emission and continuous effluent quality monitoring system (EQMS) are provisioned, installed in service.
- Adoption of new & environment friendly technologies and continuous strive for better environment management.
- Implementation of Zero Liquid Discharged (ZLD) is in progress and about to complete shortly.
- For better control of fugitive emission, water spraying is being done on unpaved internal roads except during rainy seasons.
- An amount of Rs. 801.3 Crores have been earmarked in the Feasibility Report for Nabinagar STPS towards environmental measures like ESP, Chimney, Cooling System, Ash Handling and Disposal, Effluent Treatment, Recycle and Reuse, Sewage Treatment, Dust Extraction and Suppression System, Fire Fighting and Safety, Green Belt and Afforestation etc. Various systems are under implementation at site. Apart from the above 839 Crores has been allocated to completion of FGD works 90% Civil works completed 70% Mechanical works are almost completed.
- Flue Gas De-sulphurisation (FGD) system installation and commissioning is under progress for SO₂ control. COFA & SOFA installed and commissioned for NOx Control.
- Municipal Waste Management: Vermi-composting, waste segregation and disposal to common township waste-disposal facility.
- **Environmental Institutional set up:** Experienced, qualified, and dedicated environment management group at project level supported and assisted for environment monitoring and management at station, regional and corporate level.
- **Hazardous Waste Management:** Authorization (Ref No.: HW/B-2977 dtd. 03.07.2020, Valid Upto: 02.07.2025) by Bihar State Pollution Control Board (BSPCB)..Storage and disposal of hazardous waste as per rule & direction contained in authorization. Renewal application of Hazardous waste authorization has been submitted in BSPCB online portal on 26.03.25.
- **Bio-Medical Waste Management:** Authorization (Ref No.: BMW/737/25/B-4112 dtd. 05.05.2025 and Valid Upto: 04.05.2030) by Bihar State Pollution Control Board (BSPCB).







PART-I

ANY OTHER PARTICULARS FOR IMPROVING THE QUALITY OF ENVIRONMENT.

1. **Large Scale Plantation Program:** 1.75 lac. saplings have been planted under mass afforestation program. Further 20,000 saplings work under progress for Miyawaki plantation through DFO Aurangabad.
2. Regular monitoring of various Environmental Parameters is being carried out by vendor approved by MoEF/Govt of Bihar and all necessary steps are being taken to maintain the same within prescribed limit.
3. **Water Management:** Periodic water balance study and water meters installation at all required place to access actual water consumption and opportunity to reduce water consumption further. STP treated water has been utilized for raising of green belt in township area.
4. **Ash Dyke Management:** Installation of Ash Water Recirculation System (AWRS), Toe drain water recirculation system (TDWRS) and maintaining water cover lagoon leads to reduce conservation and elimination of fugitive emission from ash dyke. 8 no's of water tanker has been deployed in ply area of ash trucks for effective control of fugitive dust emissions
5. **Bulker washing system:** Bulker washing system installed and commissioned at the HCSD Silo area for effective control of fugitive dust emissions.
6. **Wheel Washing System:** Wheel washing system at Ash dyke area has been installed for effective control the fugitive dust emission while plying the ash trucks.
7. **"One Plant for Mother Earth" Initiative:** Plantation activity undertaken on every employee's birthday, for promoting individual environmental responsibility.
8. **Plastic Waste Disposal:** 35 MT of plastic waste successfully co-processed through M/s Dalmia Cement Plant, Rohtas, Bihar in FY-2024-25
9. **Environmental Awareness:** Mass awareness programs such as training classes, mass tree plantation, slogan, essay writing, painting competition, Environmental Quiz competition among school children, employee & family members of NSTPS and their associate agencies are taken up for better awareness towards environmental protection.
10. Complete infrastructural facilities and technological support for proper monitoring & effective management of surrounding environment.
11. World Environment Day'2025, World water day and other environment related celebrations were conducted at NTPC Nabinagar. 700 no's of Saplings were planted on world yoga day in NTPC Nabinagar.
12. Implementation of Integrated Management system (IMS) as per ISO: 14001:2015 (EMS), ISO: 9001:2015, ISO:45001:2018.

Approved

Dust Suppression measures

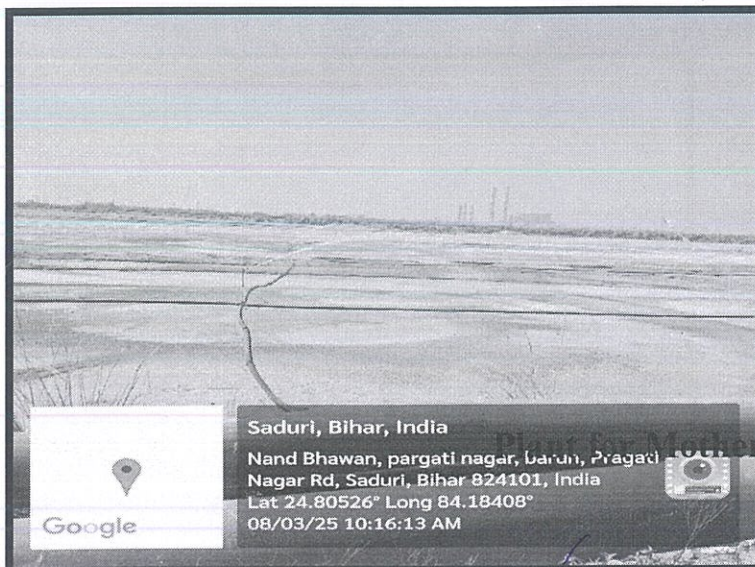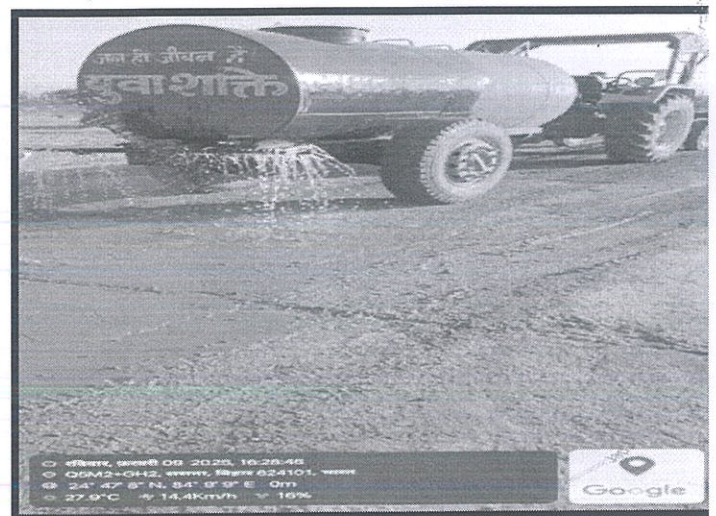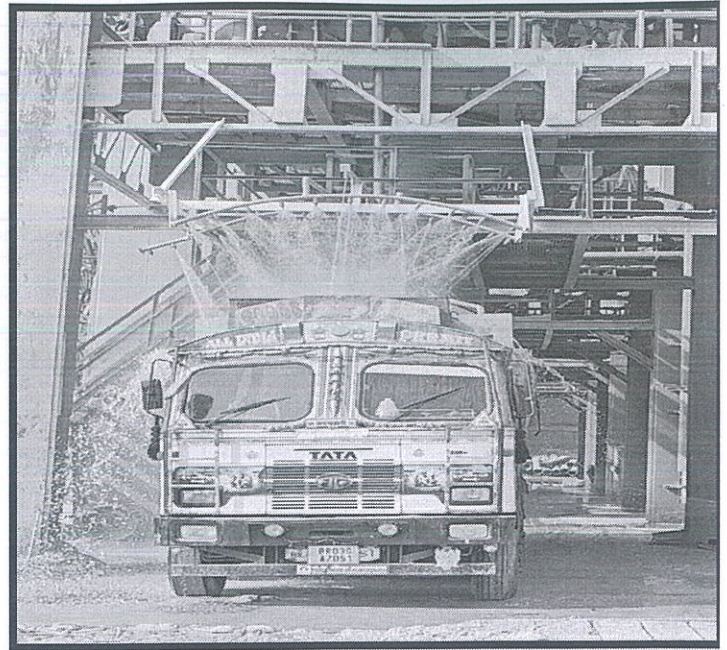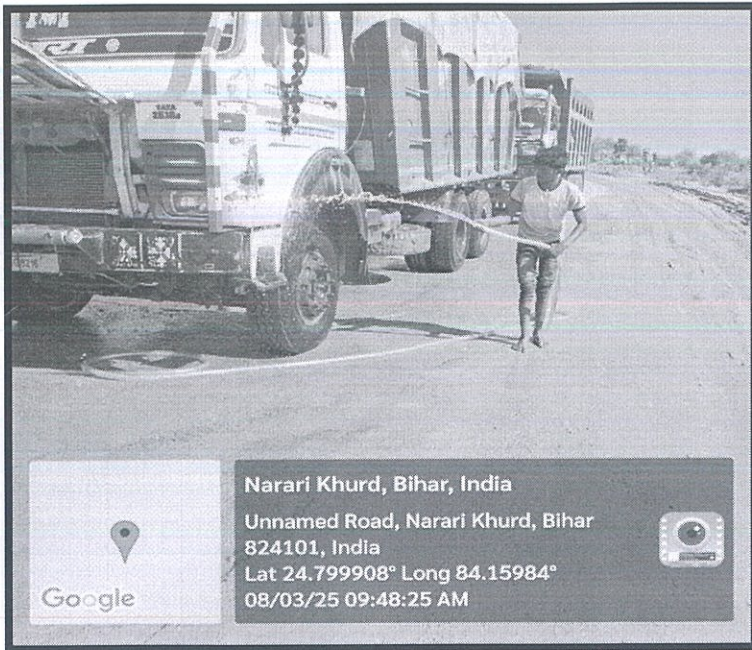

Earth Campaign

Ragunath



World Water Day 2025




Miyawaki Plantation of 20,000 Saplings




Nagpur


Plastic Waste disposal

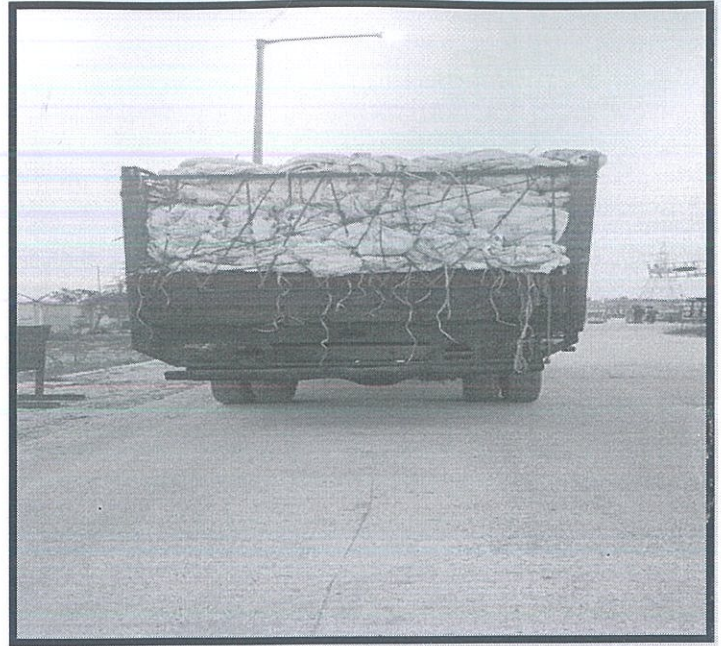

Hazardous Waste Storage Area

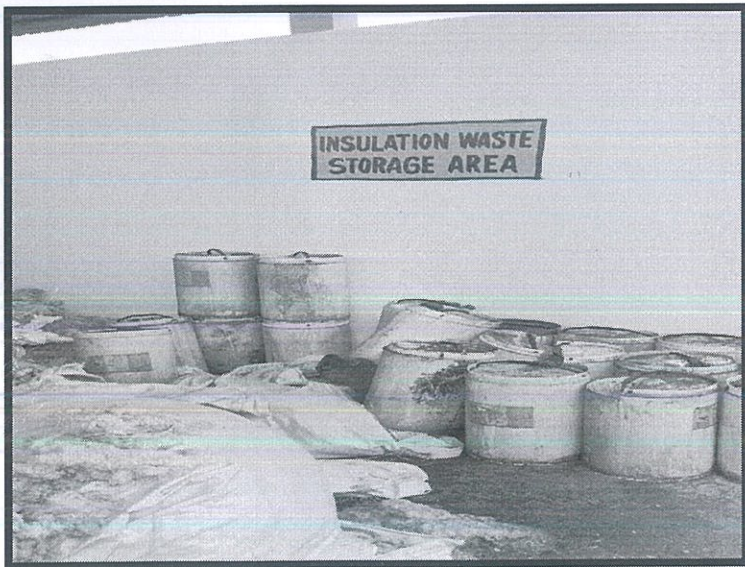


Policy Display at NSTPP


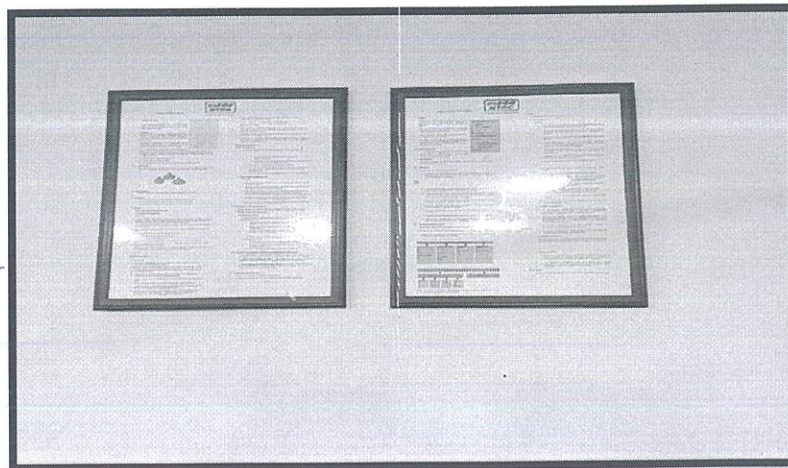


NAgrewal

Vermicomposting

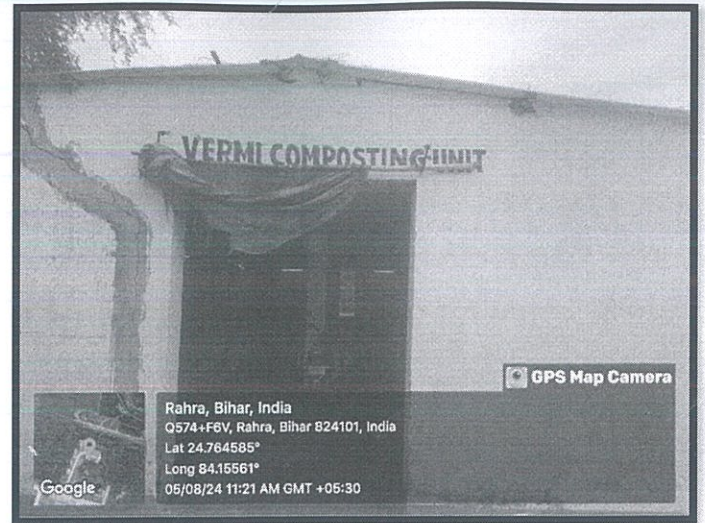

ZLD System

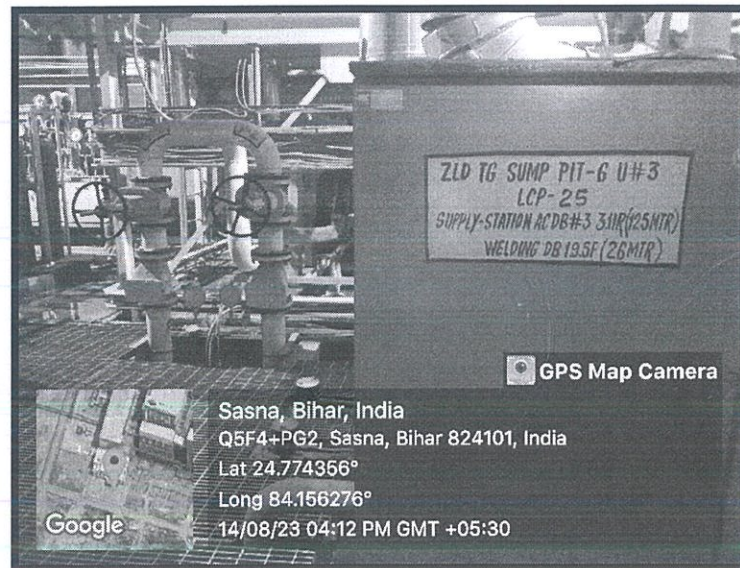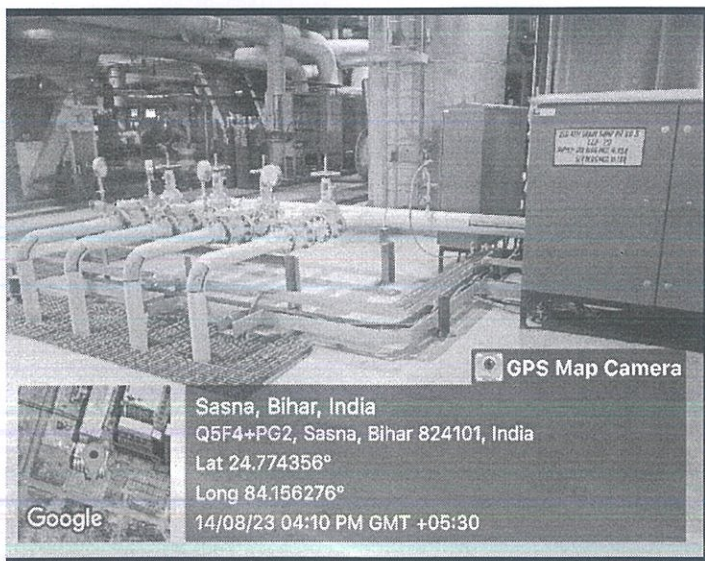

Date: 19.09.2025

Brijendra Agrawal
19/09/25

(Brijendra Agrawal)
Add. General Manager (TS/EMG)
Nabinagar Super Thermal Power Station
P.O. Aditinagar (NSTPS Township)
Aurangabad, Bihar-824304.